

HAI OmniTouch[®] 10p

The HAI OmniTouch 10p is a full-featured wireless portable Touchscreen utilizing HAI's newest Touchscreen software. With a 10.4 inch diagonal active screen area and light weight, the OmniTouch 10p adds a whole new element to home automation control.

FEATURES

- 10.4" SVGA LCD Full Color Display

- HAI OmniTouch Pro Software with Video Camera Capability

- Navigation Button and Four Programmable Hard Buttons

- Windows XP Embedded Operating System

- Built-In Wi-Fi 802.11 (n) Wireless

- 10/100 Ethernet Port, RS-232 Serial Port

- 500Mhz AMD Geode, 512MB Memory, 4GB Flash Memory

- Two USB Ports, SD Card Slot, VGA Out


- Integrated Fold-Out Stand on Back

MORE ONLINE: www.homeauto.com/info/omnitouch10p 



*Shown with Docking Cradle Charger (HAI Part Number 67A01-1) available separately.

THE HAI IP-BASED PRODUCT SUITE

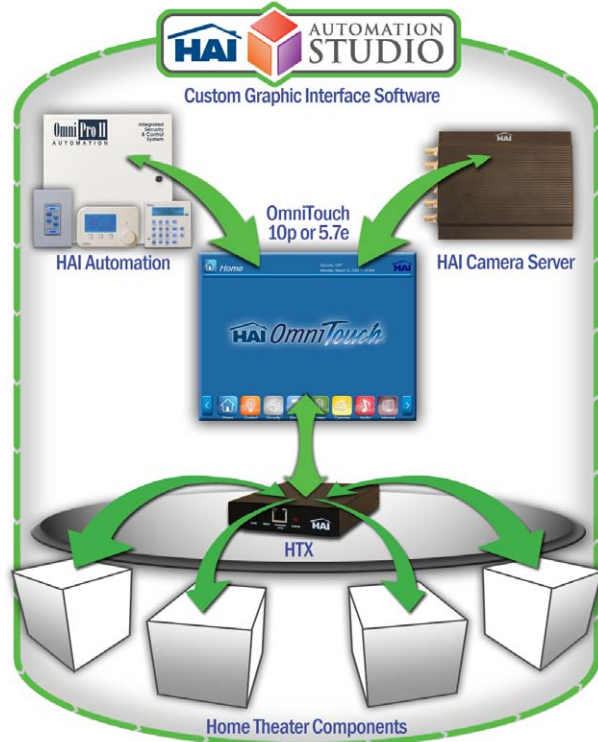

The OmniTouch 10p Touchscreen ships ready to use with HAI's all-new interface design utilizing HAI OmniTouch Pro Software, or can be fully customized with HAI Automation Studio software. When used in conjunction with HAI's Home Theater Extender (HTX), the OmniTouch 10p can control a home theater and other Infrared (IR) products, along with the home's entire automation system.

With the OmniTouch 10p, the HTX, and Automation Studio any room—whether a home theater, corporate boardroom, or school classroom—can be automated. When an HAI controller is added, control of the home's lighting, temperatures, and security can be set to the same button on the OmniTouch 10p Touchscreen.

Hard buttons on the OmniTouch 10p Touchscreen can also be setup for specific functions like closing curtains or shades, lowering a screen, or turning on particular A/V equipment.



Control and Convenience

The HAI Home Theater Extender (HTX) works with the OmniTouch 10p to control home theater equipment. The HTX has a built-in IR library with over 300,000 IR codes and the ability to learn new IR codes. The OmniTouch 10p sends commands to the HTX, which controls A/V equipment using its serial ports, IR ports, and relays.

The HTX comes with IR Flashers (emitters) that attach to the IR Receiver of any A/V equipment you wish to control. The OmniTouch 10p can then send IR commands to those devices.

Additionally, the OmniTouch 10p can access the Internet via a web browser or quickly link to weather, stocks, traffic, and more through custom buttons added via Automation Studio.

Its interface also allows for the display of multiple languages with additional language character set support to come.

Security Surveillance Video

The OmniTouch 10p can display video from IP cameras that provide JPG or MJPEG output. These types of cameras may be set up without the need for any additional hardware. HAI Automation Studio is required to set up IP or analog surveillance cameras for viewing on the OmniTouch 10p Touchscreen.

INCLUDED WITH PACKAGE	
OmniTouch 10p Touchscreen	67A00-1
19V 2.6A 60W AC Adapter	-
Extra Stylus	-
Documentation	-
ACCESSORIES	
Docking Cradle Charger	67A01-1
Extra Rechargeable Battery	67A03-1

